

Good Quality
Good Reputation
Good Development

R&D for hotel access system

Household electronic door lock
Cabinet lock

Chinese manufacturer

Hotel card key lock system
Household digital lock
Cabinet lock



Add.: E Building, YueAn Industry Park, Dongpu, Tianhe District Guangzhou, China
Tel: 86-20-8232 6980 Fax: 86-20-8232 6980 Zip: 510660
Mobile: 0086(0)13360557572
Email: douwinlock@yahoo.com , sales@douwinlock.com



DouWin
LOCK 广州都云电子有限公司

DOUWIN INT'L INDUSTRY LIMITED

Professional Production, Research&Develop for electronic lock system
<http://www.douwinlock.com>



DouWinLock


What you see



What you get

Virtues of Mifare card

Mifare card can be written by different 16 kinds of security access systems (such as RFID lock system, parking system, consumer system, etc.) because mifare card have 16 sectors (one sector equal to one RFID card). you can according your requests to choose which sector suitable for your hotel projects.'



613MFSE

Mifare card Hotel door lock



**DouWin
Lock**

酒店分体锁
Hotel lock (Split-type)

671RFSC



不锈钢插芯锁体 C
Stainless steel lockcase
fireproof Grade



亮铬
Chrome Plated



镀金
PVD



镍扫砂
Satin Nickel



黑色PVD
Black PVD

P03

www.douwinlock.com

- —CP (亮铬)
- —SN (镍扫砂)
- —PVD (镀金)
- —BPVD (黑色PVD)

技术参数 Specifications

卡片类型 Keycard	M1卡	Mifare Card
	57卡	T57 Card
功耗 Power	静态功耗 Static current	$\leq 20 \mu A$
	动态功耗 Dynamic current	$\leq 200mA$
工作温度	Working temperature	$-25^{\circ}C \sim +65^{\circ}C$
碱性电池	AA alkaline batteries	4 pcs
电池寿命	Battery duration	1 year
电子钥匙	Electronic key	If need
门厚范围	Applicable door range	30x55mm
	Exterior trim size(LXWXD)	211x73x15mm
面板尺寸	Interior trim size(LXWXD)	270x70x22mm
	插芯锁体	Lockcase
插芯锁体 Lockcase	门边距 Backset	56/70mm
	主舌伸出 Deadbolt	20mm

产品特点 Product Features



用卡片开锁 Unlock with card

Humanizative hotel guest room management system. The door can be opened with RF card.
人性化的酒店客房管理系统。使用感应卡开启房门。



低电压报警 Low battery alarm

It warns in case of low battery with alarm and red LED during the door access.
电压偏低时，开门后有低电压报警声响和红色指示灯闪烁，提醒你更换电池了！



使用电子钥匙 Unlock with electronic key

When the lock stops operating because of batteries that have been completely discharged, the electronic key can be used to unlock the door. Meanwhile, it is very convenient to manage alternative keys.

没电时使用电子钥匙开门，这项新的发明专利能有效地防止技术开启，并且备用钥匙的管理变得极为方便。



快速逃生功能 The anti-panic function

When opening the locked door from the inside, just turn the handle.
在门内转动把手可快速开启门舌和方舌。



不锈钢锁体 Stainless steel mortise lockcase

Mortise lockcase is made from stainless steel. Deadbolt and latchbolt retracted by lever inside at all times.
国标认证的插芯锁体由不锈钢制成。门内把手为游离状态。



P04

**DouWin
Lock**

亚克力面板酒店锁
Hotel lock (Acrylic Panel)

673RFSC



不锈钢插芯锁体 C
Stainless Steel Lockcase
fireproof Grade



P05

亮铬 Chrome Plated PVD
黄铜 Brass
镍扫砂 Satin Nickel
黑色PVD Black PVD

www.douwinlock.com

- —CP (亮铬)
- —SN (镍扫砂)
- —PVD (镀金)
- —BPVD (黑色PVD)

技术参数 Specifications

卡片类型 Keycard	M1卡	Mifare 1 Card
	57卡	T57 Card
功耗 Power	静态功耗 Static current	$\leq 20 \mu A$
	动态功耗 Dynamic current	$\leq 200mA$
工作温度	Working temperature	$-25^{\circ}C \sim +65^{\circ}C$
碱性电池	AA alkaline batteries	4 pcs
电池寿命	Battery duration	1 year
电子钥匙	Electronic key	If need
门厚范围	Applicable door range	30x55mm
面板尺寸	Exterior trim size(LXWXD)	270x70x20mm
	Interior trim size(LXWXD)	270x70x22mm
插芯锁体 Lockcase	门边距 Backset	56/70mm
	主舌伸出 Deadbolt	20mm

产品特点 Product Features



用卡片开锁 Unlock with card

Humanizative hotel guest room managment system. The door can be opened with RF card.
人性化的酒店客房管理系统。使用感应卡开启房门。



低电压报警 Low battery alarm

It warns in case of low battery with alarm and red LED during the door access.
电压偏低时，开门后有低电压报警声响和红色指示灯闪烁，提醒你要更换电池了！



使用电子钥匙 Unlock with electronic key

When the lock stops operating because of batteries that have been completely discharged, the electronic key can be used to unlock the door.
没电时使用电子钥匙开门，这项新的发明专利能有效地防止技术开启。



快速逃生功能 The anti-panic function

When opening the locked door from the inside, just turn the handle.
在门内转动把手可快速开启门斜舌和方舌。



不锈钢锁体 Stainless steel mortise lockcase

Mortise lockcase is made from stainless steel. Deadbolt and latchbolt retracted by lever inside at all times.
国标认证的插芯锁体由不锈钢制成。门外把手为游离状态。



Rear Panel



Rear Panel

P06

**DouWin
Lock**

1181RFSC
不锈钢酒店锁
Hotel lock Stainless Steel
fireproof Grade

www.douwinlock.com

- —SS (不锈钢扫砂)
- —PVD (镀金)
- —BPVD (黑色PVD)

技术参数 Specifications

卡片类型 Keycard	磁卡+RF卡	Magnetic card+RF card
	感应卡	T57 Card
功耗 Power	静态功耗 Static current	$\leq 20 \mu A$
	动态功耗 Dynamic current	$\leq 200mA$
工作温度	Working temperature	$-25^{\circ}C \sim +65^{\circ}C$
碱性电池	AA alkaline batteries	3 pcs
电池寿命	Battery duration	1 year
机械钥匙	Mechanical key	2 pcs
门厚范围	Applicable door range	30x55mm
	Exterior trim size(LXWXD)	271x70x31mm
面板尺寸	Interior trim size(LXWXD)	271x70x22mm
	门边距 Backset	56/70mm
插芯锁体 Lockcase	门边距 Deadbolt	20mm
	主舌伸出	20mm



产品特点 Product Features



用卡片开锁 Unlock with card

Humanizative hotel guest room managment system. The door can be opened with magnetic card and RF card. 人性化的酒店客房管理系统。开启房门:房客用磁卡;服务员用感应卡。



低电压报警 Low battery alarm

It warns in case of low battery with alarm and red LED during the door access. 电压偏低时,开门后有低电压报警声响和红色指示灯闪烁,提醒你要更换电池了!



内外面板为无线安装 Easy to install

It is wireless between exterior trim and interior trim to prevent potential damage to the door lock when installation. 前后面板之间无任何连线,免除因线缆被压伤而损坏门锁!




使用机械钥匙 Unlock with mechanical key override

When the lock stops operating because of batteries that have been completely discharged, the mechanical key can be used to unlock the door. 在电池耗尽又没有及时得到更换时,使用机械钥匙开门。



不锈钢锁体 Stainless steel mortise lockcas

Mortise lockcase is made from stainless steel. Deadbolt and latchbolt retracted by lever inside at all times. 国标认证的插芯锁体由不锈钢制成。门外把手为游离状态。

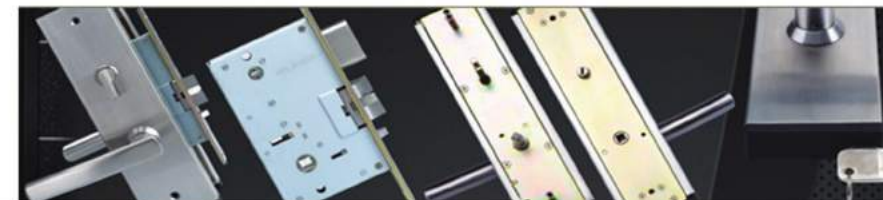

不锈钢插芯锁体 C
Mortise Lockcase



镀金
PVD

不锈钢扫砂
Stainless Steel

黑色PVD
Black PVD

www.douwinlock.com

- M616MF — BEA(Black)
- M616MF — SEA(Silver)
- M616MF — REA(Red Copper)



Douwin Lock

PRODUCT DESCRIPTION



产品特点 Product Features



用卡片开锁 Unlock with card

Humanizative hotel guest room managment system. The door can be opened with magnetic card and RF card.
人性化的酒店客房管理系统。开启房门:房客用磁卡;服务员用感应卡。



低电压报警 Low battery alarm

It warns in case of low battery with alarm and red LED during the door access.
电压偏低时, 开门后有低电压报警声响和红色指示灯闪烁, 提醒你更换电池了!




使用机械钥匙 Unlock with mechanical key override

When the lock stops operating because of batteries that have been completely discharged, the mechanical key can be used to unlock the door.
在电池耗尽又没有及时得到更换时, 使用机械钥匙开门。



不锈钢锁体 Stainless steel mortise lockcas

Mortise lockcase is made from stainless steel. Deadbolt and latchbolt retracted by lever inside at all times.
国标认证的插芯锁体由不锈钢制成。门外把手为游历状态。


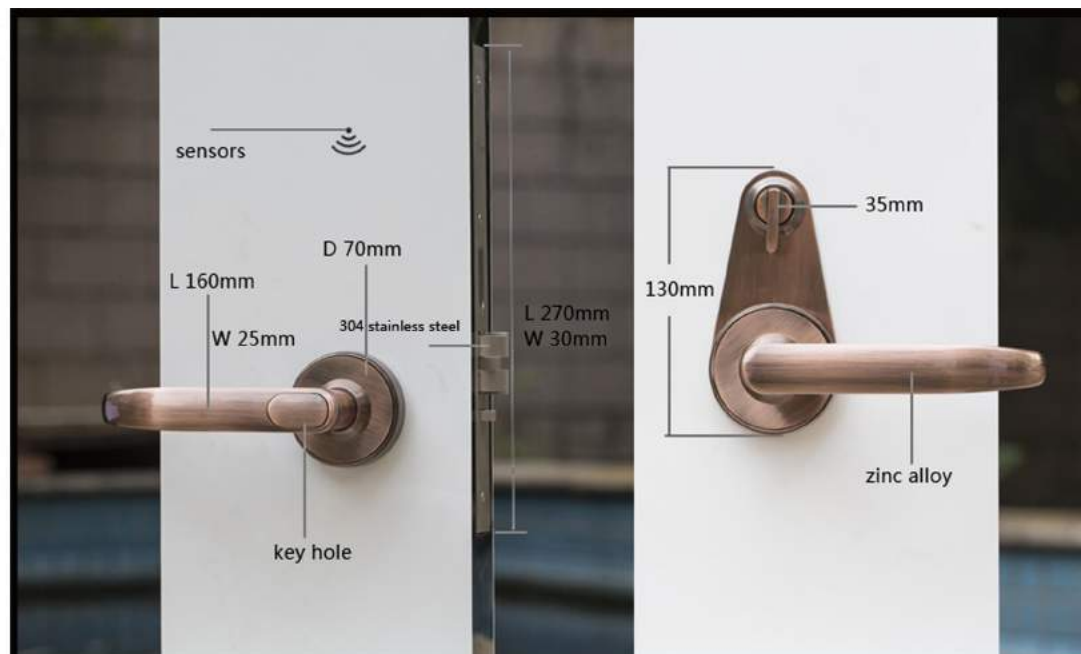




Entrance Reader



access controller

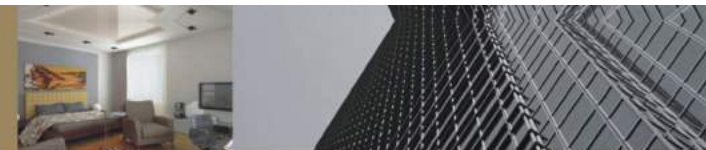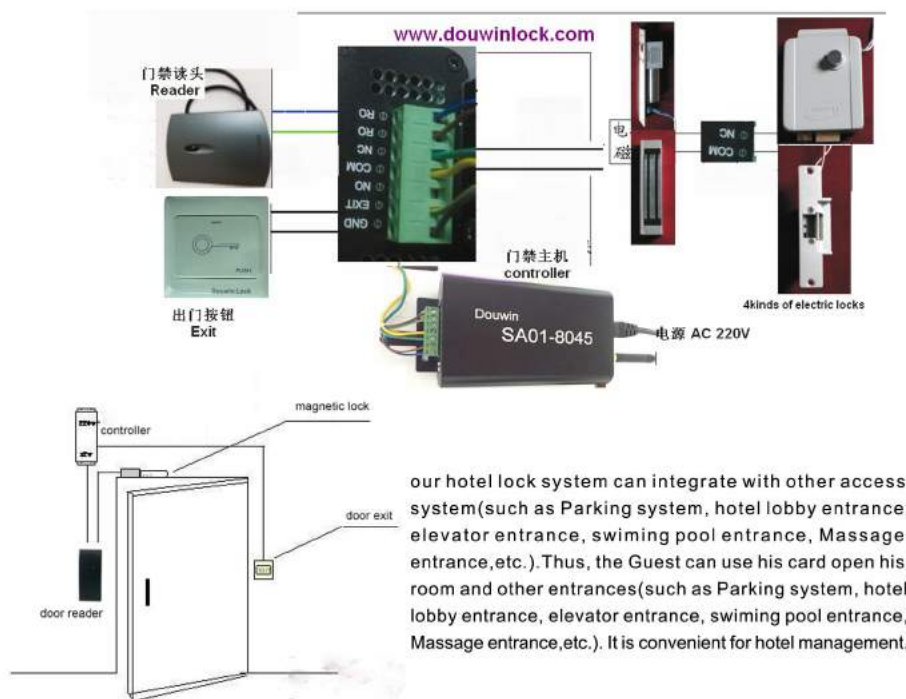

Hotel lock system Components

酒店门锁管理系统组成



Hotel door lock system (Wifi Function) Wifi 版酒店门锁系统

Working conditions (系统工作条件):

1. Hotel Reception's computer and smart phone(or PAD) must be in the same LAN by Wifi.
酒店前台电脑与手机或平板电脑必须在系统的局域网内。
2. Smart phone(or PAD) must be Android system and has Bluetooth function.
手机或平板电脑必须是安卓系统且有蓝牙功能。

Accessories



Wifi Working 工作状态



Android Smart Phone 安卓手机



Hotel Lock 酒店锁



Downloader
蓝牙转换器



WIFI Router 无线路由器

节电开关 Energy Saving Switch

Getting power with room card only
只能用房门卡插入取电
Shell of the switch is a fire-proof material.
开关外壳为防火材料
Automatically power off with 15 seconds
delay after removing out the card.
取出卡片后电源延迟15秒断电



ESS-R125khz

酒店电梯管理系统 Hotel Elevator Control Sytem

Through the hotel management software license issuing the staff cards and guest cards to use the elevator, unauthorized visitors can not be access the elevator.
使用酒店管理软件可发行客房卡和员工卡出入电梯, 访客不能随便进入电梯。
Use the hotel elevator with guest card in chosen living floor and valid time.
客房卡使用电梯受有效时间和楼层选择限定
Use the hotel elevator with staff card in chosen working floor.
员工卡使用电梯受楼层选择限定



E-66RF



Douwin Lock

洗浴中心, 健身中心, 海滨浴场, 水上乐园储物柜专用智能锁系列
The smart cabinet locks especially for bathing center, fitness center, lido, water world, etc.




Keypad cabinet lock 5208KP type 电子密码锁

DouWin 电子密码锁系列
Lock
www.douwinlock.com



尺寸: 85*56*18mm panel size



Functions



Sound indicate function
LED indicate function
Emergency open
Alarm for low power
Password digits & Restore
Multilevel code manage
Password protect function
Mode convert function
State indicate function

功能

声音提示功能 灯光提示功能
应急开门功能 低压报警功能
密码位数 密码恢复
多级密码管理 密码保护功能
模式切换功能 防撬功能
状态提示功能

Touch-Screen password lock TS5798 type 触摸屏密码柜锁

DouWin 电子密码锁系列
Lock
www.douwinlock.com

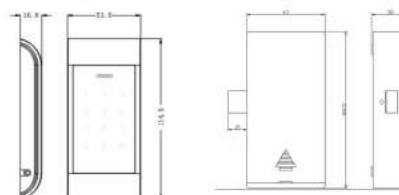

Fixed password mode:

This lock can save one code as user code.

Open password mode:

It will cancel user code each time for open door.

User can change different code before closing door.




Fingerprint cabinet lock

DW 660 type 新版指纹柜锁

Upgraded Function

- Semiconductor fingerprint
- Speed recognition
- Simple installation
- Extreme Touch
- Anti-oxidation

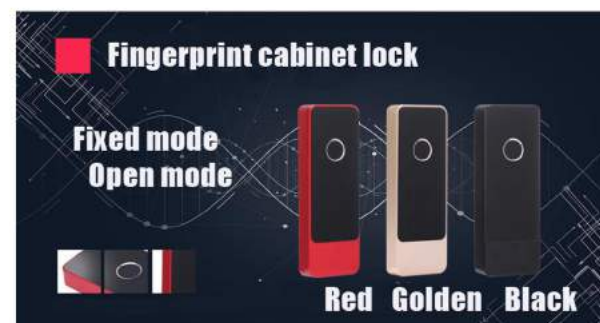



Fingerprint Safes

Hotel Room safe
Laptop type
Size:
400*370*200mm

*Opened by User Password
 or Master code
 in emergency by mechanical key*



DouWin Lock

www.douwinlock.com

technical index:

- 1) Brand: DOUWIN Lock
- 2) Open door mode: Fingerprint+ Code+mechanical Key+Remoter (distance: 30meters)
- 3) Fingerprint Collection Methods: semiconductor type
- 4) Working Voltage: 6V DC (4pcs 1.5V AA Alkaline Battery), in case the lock loss the power , you can use external 9V battery from outside supply power directly.
- 5) Static Power(45UA)Dynamic Power Consumption (250/300MA)
- 6) fingerprint Storage Capacity(SC): 32fingerprints code: 32groups,
- 7) Comparison time: ≤1sec.
- 8) Fake Fingerprint Read Rate(FAR): ≤0.001%
- 9) Right Fingerprint Misread(FRR) : 0.003% ACM Alarm Module: Static Power: 0 Dynamic Power Consumption: 25mA Applicable door thickness: 40mm-60mm



4 open lock ways:



FA822SD fingerprint lock



www.douwinlock.com



技术参数 Product specification

室外锁体尺寸 Exterior lock body size	L:190mm*W: 75.5mm*H38mm	工作电压范围 Operating voltage range	4.0~6.0V
室内锁体尺寸 Interior lock body size	L:190mm*W: 75.5mm*H38mm	应急供电 Emergency power	备用应急电源接口电压范围6~9V Equipped with emergency power interface and 6~9V voltage
适用场合 Use occasions	玻璃门 Glass door	静态电流 Idle mode current	≤30UA
适用门类型 Applicable door type	双门型 单门型玻璃门 Double glass doors, single glass door	工作温度 Operating temperature	-20℃~55℃
适用门厚 Applicable door thickness	玻璃门:12-15(mm) Glass door: 12-15mm	工作湿度 Operating humidity	≤93%
智能钥匙数量 Key capacity	指纹: 500枚卡+密码:1000个 fingerprint: 500 Users card+password: 1000Users	开锁方式 Unlock methods	手机 指纹 智能卡 密码 遥控 APP fingerprint, card, password, remote
电源 Operating voltage	DC6V(4节5#电池), DC9V备用电源 DC6V(4x5#battery), DC9V reserving power	可选颜色 Available colors	银色&黑色 silver and gold

智者 芯容天下

选材上乘，以先进前沿的智能科技，仿似大浪淘沙般荡涤
外在的质地与内在核心科技浑然一体
将高贵时尚的品位之尊完美体现



A822SD Model HOME & OFFICE INTELLIGENT LOCK

卡片+触屏智能锁

多种开锁方式、不锈钢三方位插芯锁体、紧急机械钥匙

COLOR 颜色

- ◎ 镍扫砂 Satin Nickel
- ◎ 亮铬 Chrome Plated
- ◎ 黑色PVD Black PVD



密码开锁 Password
卡片开锁 RF card
机械钥匙开锁 Mechanical key



镍扫砂 Satin Nickel

www.douwinlock.com

www.douwinlock.com

电子防盗锁

Anti-thief door lock

手机就是你的钥匙!

Your Mobile Is a Door Key!

BLUETOOTH SEARCH

A675 type



- 密码开锁+卡片开锁+电子钥匙(不锈钢插芯锁体)
Unlock with smart keypad+Card+Electronic Key (Mortise lockcase)
- 密码开锁+手机开锁+电子钥匙(不锈钢插芯锁体)
Unlock with smart keypad+Card+Electronic Key (Mortise lockcase)
- 密码开锁+卡片开锁+电子钥匙(三方位防盗锁体)
Unlock with smart keypad+Card+Electronic Key (Heavy duty mortise lockcase)
- 密码开锁+手机开锁+电子钥匙(三方位防盗锁体)
Unlock with smart keypad+Card+Electronic Key (Heavy duty mortise lockcase)



Stainless Steel Lockcase
Mortise C



fireproof
Anti-thief Lockcase
Mortise D

技术参数 Specifications

卡片参数 RF Card	卡片容量 Capacity	Max.32
	母卡 Master card	1
密码参数 PIN code	密码容量 Capacity	32User code
	数字组合 Combination	6-12 Digits
蓝牙参数	Bluetooth of mobile	Wireless
碱性电池	AA alkaline batteries	4 pcs
电池寿命	Battery duration	1 year
电子钥匙	Electronic key	1 pc
门厚范围	Applicable door range	40-60 mm
	Exterior trim size(LXWXD)	270x70x20 mm
面板尺寸	Interior trim size(LXWXD)	270x70x22 mm
防盗锁体 Lockcase	门边距 Backset	64 mm
	主舌伸出 Deadbolt	25.4 mm





产品特点 Product Features



用密码开锁 Unlock with smart keypad

keypad displays functional operation with lighting. Use the fake PIN code feature whenever there is any chance of exposing the right PIN code to others.

智能触屏输入密码开锁，可使用假码输入法以防他人偷窥。



用卡片开锁 Unlock with card

Registered cards can be individually deleted and the new card can also be individually registered.

可单独添加卡片；可单独删除卡片，无需重新设置。



用蓝牙开锁 Unlock with mobile with bluetooth

Open the door with Blue Tooth of your mobile, its advanced Blue Tooth verification technology guarantees more secure and convenient life.

用手机蓝牙功能开锁，这种新技术给你带来极大的方便性。



使用电子钥匙 Unlock with electronic key

When the lock stops operating because of batteries that have been completely discharged, the electronic key can be used to unlock the door. 不设机械钥匙。没电时使用电子钥匙开门，这种新的发明专利能有效地防止技术开启！



门内强制锁定 Internal forced lock mode

Internal forced lock prevents anyone to unlock from the outside, open the door only manual thumbturn from the inside.


门内强制锁定后，门外不能开锁，只能门内转钮解除，既省电又安全。



不锈钢防盗锁体 Heavy duty mortise lockcase

Mortise lockcase is made from stainless steel. Deadbolt thrown by lever from either side. When outside is locked, deadbolt is retracted by lever outside with password or fingerprint. Deadbolt and latchbolt retracted by lever inside at all times.

国际认证的天地杆插芯锁体由不锈钢制成。门外把手上提锁门后为游荡状态，门内把手直接开锁。

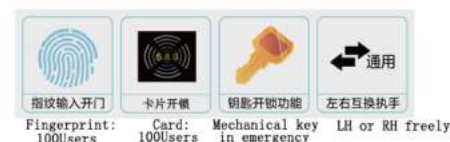

F730RG
古铜



F730XG
香槟金


www.douwinlock.com



F750SF
银色




F750RF
红铜

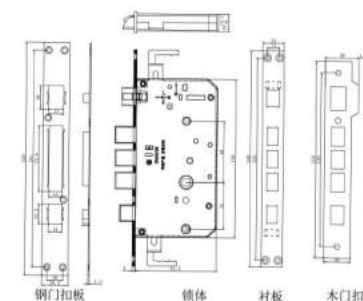

50x50mm 碰珠锁体

技术参数 TECHNICAL DATA

- 中心距: 50mm
- 门距: 50mm
- 方孔/一字槽: 8x8mm / 铁/锌合金
- 斜舌: 材质/不锈钢
- 方舌: 材质/锌合金
- 衬板/扣板: 201#304# 铜拉丝/青古/红古/PVD
- 衬板厚度: 3.0mm 扣板厚度: 1.0mm
- 功能: 碰珠, 不分左右, 配假插芯锁芯, 具有上提锁门功能。



Addresses to room shows the bell
门牌房态显示门铃

www.douwinlock.com



M-SJ01



M-SJX9(中文)



M-SJ2

功能特点 Feature

- 面板材质: 亚克力/钢化玻璃
- 背光触摸式设计 (电容式/电阻式);
- 永久保存参数设计;
- 请勿打扰和请即打扫(具备互锁功能);
- 当客人想清扫房间时, 在房间内按下“请即打扫”开关, 门外指示牌中带清扫标识灯常亮, 提示服务员及时打扫房间;
- 当客人不想被打扰时, 只要在房间内按下“请勿打扰”开关, 门外指示牌中带勿扰标识灯常亮, 提示别人请勿打扰, 叮咚门铃不触发;
- 当客房主人不方便会客时, 按下请稍候, 提示客人稍等后;
- 超亮LED数码管显示酒店房间号码, 房号智能设置, 随意更改。(更改方法见产品安装说明);
- 智能触摸屏叮咚门铃触发。

- Panel Material: acrylic / tempered glass
- Backlight touch sensitive (capacitive / resistive);
- Permanent preservation of the parameter design;
- Do Not Disturb and please clean (with interlock function);
- When guests want to clean the room, press the "cleaning" switch in the room, door signs with clean logo lights lit, prompting the waiter to clean the room in a timely manner;
- When the guests do not want to be disturbed, simply press the "Do Not Disturb" switch in the room, outside signage with a disturbance in the logo lights lit, suggesting that others do not disturb, ding-dong doorbell does not trigger;
- When the room master inconvenient parlor, press, please wait prompt guests wait;
- Super bright LED digital display hotel room number, room number, the smart set, free to change. (Change see installation instructions);
- The intelligent touch screen ding-dong doorbell trigger.



M-CM3




M-SJ01(白色)



I-TSW




M-3H (七彩闪灯)

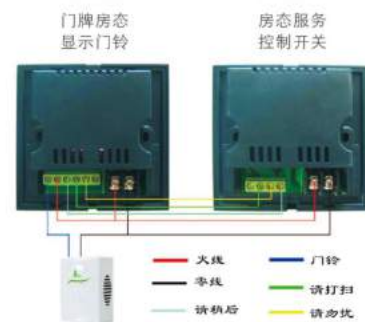

特点 Feature www.douwinlock.com

- 面板材质: 亚克力/钢化玻璃
- LOGO区域有灯光显示
- 房号及字体可指定
- 门牌尺寸: D=152*38mm
- 灯光颜色可以自定义

- Panel Material: acrylic / tempered glass
- LOGO region there was a light to show
- Room number and font can be specified
- House size: D=152*38mm
- The light color can be custom




智能房号门铃开关功能介绍 Smart room doorbell switching function



门铃采用黄色背光指示, 触摸屏门铃标识时, 背光转化为蓝色, 表示门铃已工作, 电铃接通, 提示有人来访。房号采用液晶显示屏或数码管显示屏全天候亮起, 采用LED光源技术, 不耗电。



The doorbell with yellow backlight indication, the touch doorbell logo, backlight conversion blue, the doorbell has been working bell on, suggesting that someone visiting. Room number using the LCD screen or digital display lit around the clock, and LED light source technology, not a power.



(雕刻房号)

Centralized control touch screen
集中控制触摸屏

www.douwinlock.com



侧视图
Side view



背视图
Back view



侧视图
Side view



DC-29

椭圆形集中控制触摸屏(金边)

The oval centralized control touch screen (Phnom penh)



DC-27

椭圆形集中控制触摸屏(银边)

The oval centralized control touch screen (Silver edge)



壁挂式
wall

BC-30

椭圆形集中控制触摸屏(金边)

The oval centralized control touch screen (phnom penh)



86底盒安装

86 box is installed at the end



壁挂式
wall

椭圆形集中控制触摸屏(金边)

The oval centralized control touch screen (phnom penh)



壁挂式
wall

BC-28

椭圆形集中控制触摸屏(银边)

The oval centralized control touch screen (Silver edge)

功能特点 www.douwinlock.com

- 集中控制触摸屏采用高档水晶面板或钢化玻璃面板，电容触摸，即时触发，安全可靠，不怕湿手触摸。每路负载：小于或等于150W，空调2000W。
- 技术参数
 - 空调控制：中央空调管道风机转速高、中、低控制
 - 工作电压：集中控制面板12V控制，小分控制触摸屏12V控制
 - 工作环境：-40℃~70℃
 - 相对湿度：最大相对湿度85%（20℃）
 - 联接方式：通过RS485方式与灯控配电箱联接。
- 集中控制触摸屏与86触摸开关搭配，可以做双控控制。集中控制屏控制键为右下角2行从右至左4个键。当房间灯亮的时候，相对应按键有灯光指示，表示这一路的灯已经点亮，方便客户知道哪些灯没有关闭。
- 集中控制屏的功能区灯控具体内容可以根据客户要求来定制。
- 可调光，长按变光键，灯光从暗到亮再转暗——循环变化。
- 集中控制屏面板如果30秒没有操作，面板上的灯光自动灭掉，不影响客人休息。当需要操作的时候，只要任意触碰面板，背光亮起，方便客人夜间操作灯光。
- 集中控制触摸屏欢迎光临区域是背光显示，可以做酒店LOGO名称。
- 入住模式，当总关所有灯以后，空调不关闭，仍然能继续工作。

系统组成部分 System components

集控屏控制开关系统由：灯控配电控制箱、集中控制触摸屏主板、86触摸4路灯控分触摸屏面板（安装在门口）组成。

- 灯控配电箱：RS485通讯接口、照明空调控制输出、电源组成。
A、集中控制触摸屏和灯控分触摸屏通过一根4芯电话线或弱电网线连接（RS485）通讯与灯控配电箱通讯。（RS485通讯线要与强电线路要分开布线或用线管隔开）这样既节约电线又避免触电的危险，保证人身安全。
B、控制箱照明空调输出与房间所有灯和空调的连接，线路集中查找方便。
- 集中控制触摸屏：分桌立式和壁挂式2种，可以选择11路、13路控制。圆形、长方形、椭圆形、金边、银边等多种外观选择。功能：所有键单开控制、左右床灯调光控制、中央空调功能控制、总关控制、4路双控控制等。
- 灯控分触摸屏：可以选择4路与集中控制触摸屏实现双控。

Set touchscreen control switch system consists of: light distribution control box control, centralized control touch panel, touch 486 street lamp control points touching panel (installed in the door).

- Light control switch box: RS485 communication interface, lighting, air conditioning control output, the power supply.
A, centralized control touch screen and touch panel lamp control points through telephone lines or weak current use A 4 core cable connection (RS485) distribution box with light control communications. (RS485 communication line with high voltage lines to separate wiring or separated thread tube) this is save wire and avoid the risk of electric shock, ensure the personal safety.
B, control box, lighting, air conditioning output links with all the lights and air conditioning room, centrally located convenient.
- Centralized control touch screens: points table vertical and wall, can choose 11, 13 road control. Circle, rectangle, oval, phinon penit, silver edge, and other appearance. Function: single open all the key about control, bed lamp dimming control, central air conditioning function, total clearance control, dual control control 4 road, etc.
- Light touch screen control points: can choose 4 road and realize centralized control touch screen control.



小分控触摸屏 Small control touch screen

通过485接线可实现与集中控制触摸屏双控。



触摸屏灯光控制系统、门铃系统布线图 Touch screen lighting control system, the bell system wiring diagram

hotel room lamp control system wiring diagram
www.douwinlock.com

